

Wireless location tracking sensors in Industry 4.0

*Frederik Unser,
Groß-Gerau, 15 April 2018*

Abstract

The literature review evaluates the most common standards of sensors and techniques that can be used for wireless location tracking in an Industry 4.0 organisation. It was found that tracking via radio waves is most common, they can be distinguished in dynamic systems that use triangulation (WLAN 802.11 and ZigBee), with a new development of fingerprinting, and stationary systems like near field communication (NFC) which is relying only on middleware and transmitter location.

Opportunities are highly customized products, Augmented Reality and customer insight, while challenges are not only data security and privacy. Further, an organisation must review if a valid and (financially) feasible business case can be created and with what choice of technology.

Contents

Contents	2
1. Opportunities with wireless location tracking	3
2. Sensors for position tracking	3
a) Basics on sensor theory	3
b) Wireless technologies.....	5
I. WLAN 802.11	5
II. ZigBee	6
III. Near-field communication (NFC)	7
3. Challenges.....	8
a) Technical challenges.....	8
b) Business case and value chain modification.....	8
c) Security	8
d) Privacy and the law	9
4. Poster	10
5. Bibliography	11
6. Appendix A1: Reflecting on the creation process	13
a) Description	13
b) Feelings.....	13
c) Evaluation	13
d) Analysis.....	13
e) Conclusion	13
f) Action Plan	13
7. A2: Industry 4.0.....	14

Word Count: 1540

The word count excludes the following:

- Cover page
- Contents page
- References and Bibliography
- Diagrams and sub text
- Poster section
- Appendices



1. Opportunities with wireless location tracking

In 2017, cutting machine manufacturer Lectra launched several “Industry 4.0” services to their customers, allowing them to react to increasingly quicker requests of new designs (HARARI, 2018) or highly customized gear like athletic footwear (THOMAS REUTER ONE, 2017). The Industry 4.0 term was coined in the recent years (see Appendix A2 for details), forecasting a more connected, flexible and transparent production of goods and services using information technology (IT).

It can be considered worth tracking: First, the resource itself for a production process, allowing cloud controlled systems or local middleware to allocate the workpiece, enabling the business to move a workpiece through the manufacturing with individualized work orders, while at the same time doing stock-keeping and probably showing the customer where his product is.

Secondly, as part of Augmented Reality, which will require accurate tracking of the personal using it, to overlay the reality with enriched content based on the organisations databases, like with Google glass (Pierdicca, Frontoni, Pollini, Trani, & Verdini, 2017).

Finally, people working in Industry 4.0 may require location tracking, due to the requirement of more flexible working times and changing places (Hecklau, Galeitzke, Flachs, & Kohl, 2016). Location tracking of people could be associated with business work flows, allowing the IT systems to track that and for how long a work piece is worked on. In hazardous or risky environments like mines, tracking can avoid accidents (Hedley & Gipps, 2013).

2. Sensors for position tracking

a) Basics on sensor theory

With sensors, there is the measurand, *what* is being measure, and the transductor, the device capturing the measured data and allowing data processing (Kalantar-zadeh, 2013). In this document, the ultimate measurand is the location of the tracked item in question, the intermittent measurand in tracking with wireless devices is mostly based on signal strength or an identification number.

Base of all these technologies is the approach in IT to replace wires (Yang, 2014) and allow wireless data transmissions. See figure F.2a.1 for an overview of the current standards and their most common usage grouped by distance.

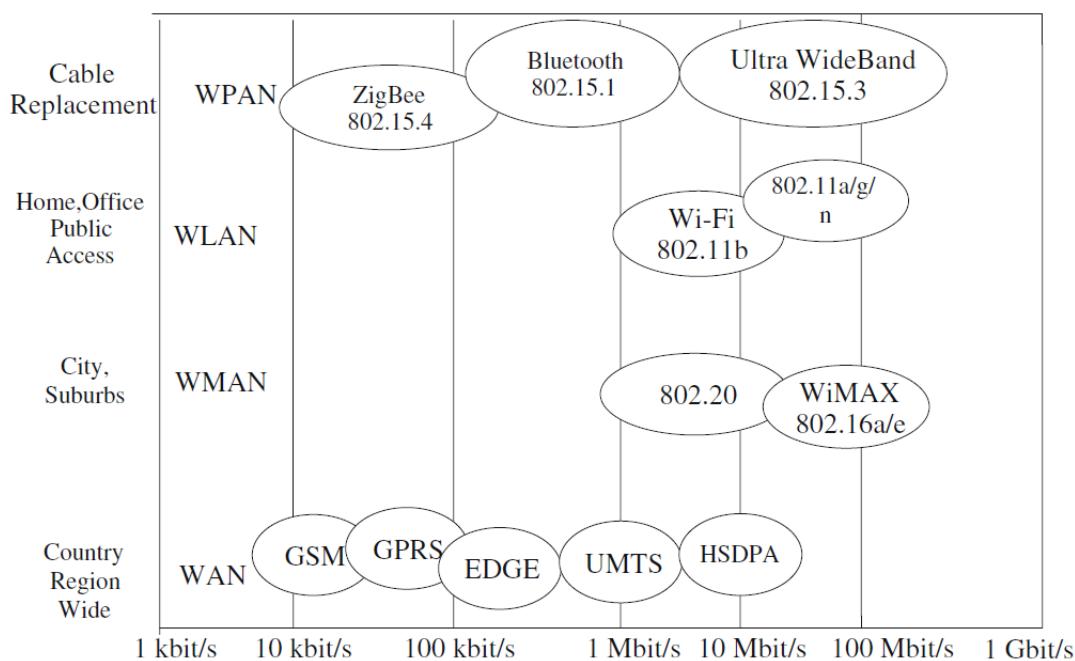


Figure F.2a.1: Overview of most common wireless networks

Source: Adapted from S.-H. Yang, *Wireless Sensor Networks - Signals and Communication Technology*, London: Springer-Verlag, 2014, figure 1.1, p. 2

The distance that signals can travel are bound to the frequency and typical blockage. Figure F.2a.2 shows the wavelength spectrum and highlights the radio waves spectrum.

Waves with a higher frequency have a very short-wave length, which is blocked quicker than low frequency and long-wave length (Lehpamer, 2012).

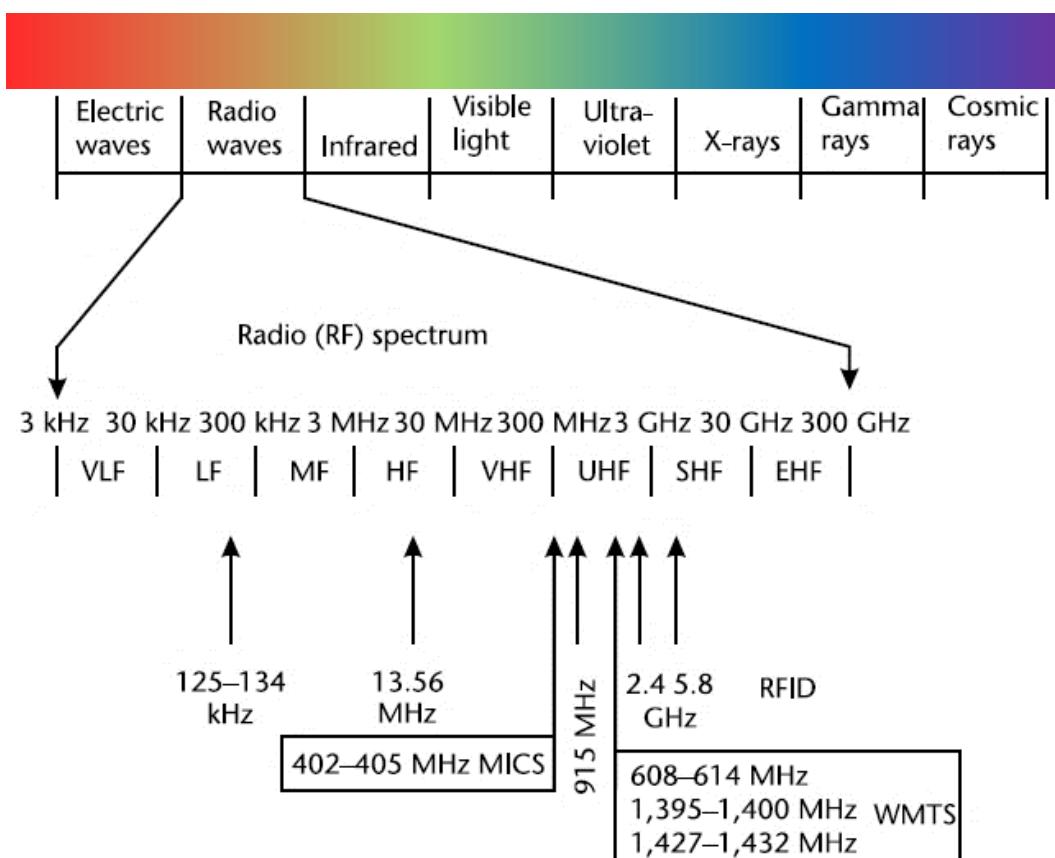


Figure F.2a.2 Electromagnetic radio wave spectrum as part of the overall wave spectrum
Source: Adapted from Lehpamer, H., *RFID design principles* (Second ed.), Norwood: Artech House, 2012, figure 2.2, p. 7

This should be carefully reviewed when an organisation is choosing the technology for location tracking, considering the surrounding factors of the installation like building materials or room dimensions.

b) Wireless technologies

There are numerous ways of wireless data transmission techniques, and to some extent all allow to use it for location tracking of the client. GPS tracking is not suitable for indoor tracking, given that the client must have a clear line of sight (LOS) of at least three satellites for accuracy. The (visible) light spectrum could be used for location measurements, but it is more often applied in stationary measurements, like for quality purposes (Ross, 2013).

Other technologies not discussed here are RADAR or Bluetooth low Energy (BLE).

The upcoming section will review common radio frequency identification (RFID) technologies.

I. WLAN 802.11

The wireless network that an organisation has put in place for data communication, can be used for location tracking. Memory producer Hynix did so in 2005 (PR NEWSWIRE EUROPE, 2005), with the real-time location systems (RTLS), using the 802.11 Wireless access points (AP) for tracking of material and staff, who have wireless hardware.

Figure F.2bl.1 shows that RTLS uses the measured distances (d_1, d_2, d_3) to the sender (Wireless APs), by means like signal strength, to triangulate the location of the target relatively to the three transmitters. RTLS was prepared with the location data of all the transmitters (APs), and the combined outcome is the location of the target. 802.11 operates at 2,4 or 5GHz, providing ranges of up to 70 meters and 1,3Gbit/s (802.11ac). Existing

wireless data network covering the organisation's premises, allow for quick enablement of location tracking. Target chips are medium costly as they need to be active.

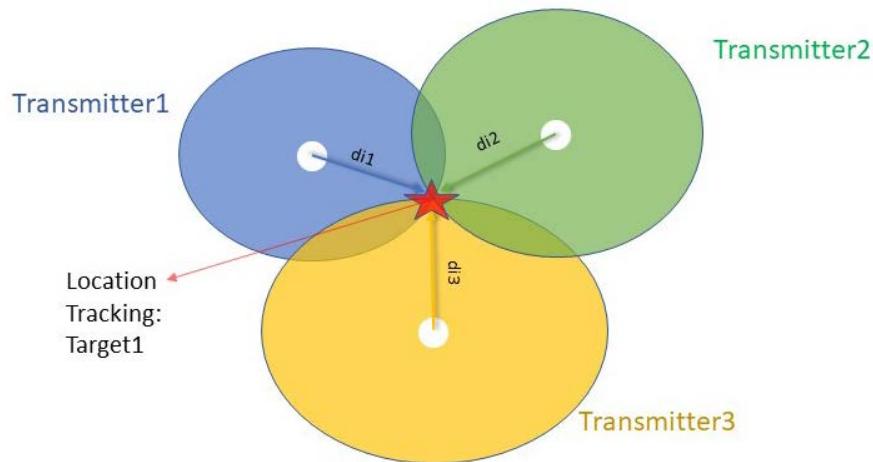


Figure F.2bl.1: Wireless Triangulation for location purposes.

Source: Author

II. ZigBee

The ZigBee Protocol operates on 2.4 GHz, but also on 868 MHz in Europe, the latter can provide better penetration through walls and alike, has lower power consumption and hardware cost is low (Yang, 2014). However, both versions do not offer high data rates (max 250kbit/s) (Yang, 2014) with up to 20m indoor range. Two changes to 802.11: First, there must be a main transmitter with a connection to a middleware software, called Coordinator and secondly, the other transmitters (called routers) can natively relay their data packages to each other, called peer-to-peer, they do not need a wired connection, see figure F.2bll.1. These networks are called Wireless Sensor Networks (WSN) (De Sales Bezerra, De Sousa, Da Silva Eleuterio, & Rocha, 2015).

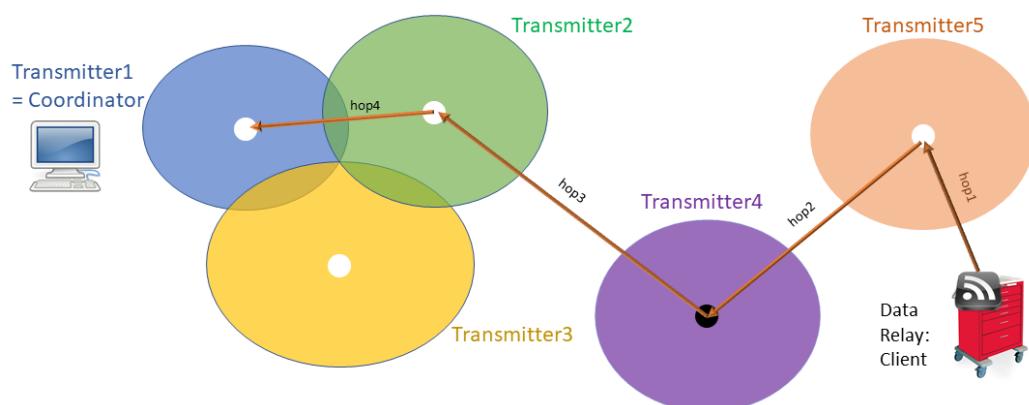


Figure F.2bll.1: ZigBee Data Transmission via relaying messages - "peer-to-peer".

Source: Author

Using, for example, signal strength for location triangulation, see figure F.2a.2, again the transmitter locations must be put into a RTLS system to combine both values and calculate the current location of the client.

Another method of location tracking is fingerprinting, which can also be used in 802.11 WLAN (Swangmuang & Krishnamurthy, 2008). During the offline phase, see figure F.2bII.2, a target-simulator scans and walks through the area of interest and maps reference locations on a grid. On each location, the specific signal strength will be and stored as a fingerprint in a large database. In the online phase, targets submit their signal strength and the central system looks the closest value up in its database, and assign it the defined location for this “fingerprint”.

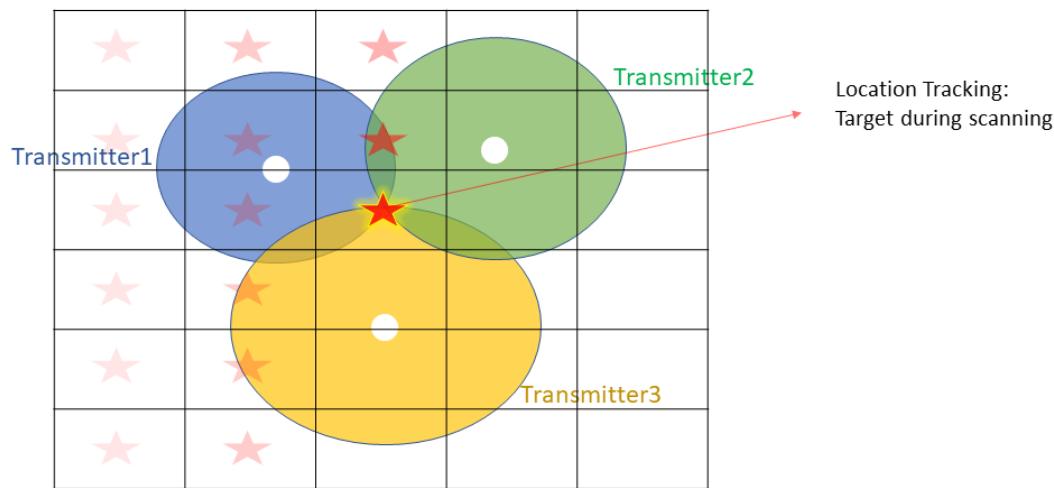


Figure F.2bII.2: Wireless fingerprinting in process.
Source: Author

ZigBee Clients allow for low power consumption (Yang, 2014), which is especially important if the environment has restraint power during operating times.

III. Near-field communication (NFC)

NFC clients are referred to as *tags* which are very cheap and can store data. The transmitter needs to supply power to the passive tag to exchange information. This data is passed to an RFID middleware, deciding on the next step of the business process.

For location tracking, the RFID middleware will have a location per transmitter and know where the item is, based on the received data the middleware can then decide and initiate the next step.

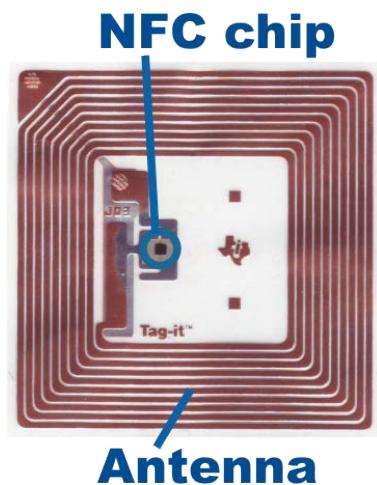


Illustration I.2bIII.1: Innerworkings of a NFC chip.

Source: Bonwal: <http://www.bonwal.fi/en/nfc-tags>

NFC, see Illustration I.2bIII.1, is on the mid frequency (13,56MHZ), low price (0,08 € for large volume), low power (passive), and very low distance (a few cm up to 5m) and billions of tags are applied per year.

Supermarkets can enable loyalty cards and move their customer tracking to NFC, allowing for further big data processes like data mining as well as saving money on the plastic card, when using the banks NFC chip (Voges, 2017).

3. Challenges

a) Technical challenges

The two main challenges are interference and obstacles causing radio waves not to be read correctly by the transmitter, induce variances in the signal strength and the calculated location. Good planning of the area that will be used for wireless, for example via a building information model (BIM) can reduce such impairments (Park a, Chen b, & Cho, 2017).

As the target is mobile, it must be assumed it is battery powered (if not a passive NFC tag) hence has limited energy resources and needs to have good energy management for any location tracking actions. Operation time of an individual client needs to be paused to recharge the battery.

b) Business case and value chain modification

Often organisation's premises have no full coverage of any wireless network due to costs calculations. Established businesses may not have found the need of using any wireless tracking technology, making it hard to see why to invest (Lee, Bagheri, & Jin, 2016). When the business has decided to setup wireless tracking for a process in the value chain, planning (like BIM) will be important, to estimate the transmitter density and the resulting accuracy required for the use case. It could be found that the project would be excessively expensive with no return of invest.

Any organisation should consider building big data use cases.

c) Security

For NFC tags, their serial number is also their MAC address, which can only be written with factory equipment, setting a high hurdle for scammers (Lehpamer, 2012).

Wireless communication can be impacted by intentional denial-of-service (DoS) attacks like *jamming*, undeliberate misuse or overloading by use of others stopping communication,

even if these factors causing distortion are off premise. Where an organisation is relying on wireless location tracking, safety measures like physical shielding and contingency plans for a downtime should be put in place and tested regularly (Larsen, Haubitz, Wernz, & Ratwani, 2016).

Security of any data must be guaranteed during the three states: while in transit and when stored in the middleware, with access only to authorized personal (Lehpamer, 2012).

d) Privacy and the law

Failure in keeping trust in data security, like the current Facebook debate (Yadav, 2018), is building up resistance to adapt new technology, including wireless tracking like NFC (Voges, 2017).

Building trust is one of the key points when working with customers, but also with staff. Key words for and ethical standards are honesty, predictability, fairness and openness (Ebert, 2009). So, when people (customer or staff) are tracked, they should be informed about it and allowed to “opt-out” of such tracking to establish a sustainability relationship with either high workforce moral (see Illustration I.3C.1) or satisfied customers.



Illustration I.3C.1 – Privacy concerns with employee tracking.

Source: Canadian Privacy Law Blog, March 16, 2018, Posted by David Fraser, URL: <http://blog.privacylawyer.ca/2011/07/dilbert-employee-locator-device.html>

As technology has no moral, organisations need to ensure the encoded processes are reflecting the ethical standards of the society the technology will be used in (Lehpamer, 2012).

Where an organisation's ethical board or CEO decide not to care about trust, the applicable law must be abided. EU does dictate General Data Protection Regulation (GDPR) with a *Privacy by Design and Privacy by Default* clause, allowing anonymous use of any service, but with the large amount of data that can be tracked back to one person by using a IOT or mobile devices, it is mandatory to rethink how to programme. (Voigt & von dem Bussche, 2017).

Wireless location tracking in Industry 4.0


Opportunities

In 2017 Lectra launched several "Industry 4.0" services to their customers, allowing them to react to increasingly quicker requests of new designs⁰¹ or highly customized gear like athletic footwear. The Industry 4.0 (I4.0) term was coined in the recent years (see NFC Tag lower right for details), forecasting a more connected, flexible and transparent production of goods and services using information technology (IT). In I4.0 there are the following opportunities for tracking: First, the resource itself for a production process, allowing middleware to allocate the workpiece, enabling the business to move a workpiece through the manufacturing with individualized work orders, while doing stock-keeping and probably showing the customer where his product is. Secondly, as part of Augmented Reality, which will require accurate tracking of the personal using it, to overlay the reality with enriched content based on the organisations databases¹⁸. Finally, people working in I4.0 may require location tracking, due to the requested of more flexible working times and changing places⁰². Location tracking of people could be associated with business work flows, allowing the IT systems to track that and for how long a work piece is worked on. In hazardous or risky environments like mines, tracking can avoid accidents⁰³.



Sensors & Waves

With sensors, there is the measurand (*what*) and the transducer (*how*) allowing data processing⁰⁴. Here, the ultimate measurand is the location of a tracked item, the intermittent measurand in tracking with wireless devices is mostly based on signal strength or an identification number. Base of these technologies is the approach in IT to replace wires⁰⁵ and allow wireless data transmissions. Signal distance are bound to the frequency and their typical blockage. Figure F.2a.2 shows the wavelength spectrum and highlights the radio waves. Waves with a higher frequency have a very short-wave length, usually blocked quicker than low frequency and long-wave length⁰⁶. Organisation need to carefully when choosing a technology for location tracking, considering the surrounding factors like building materials or room dimensions.

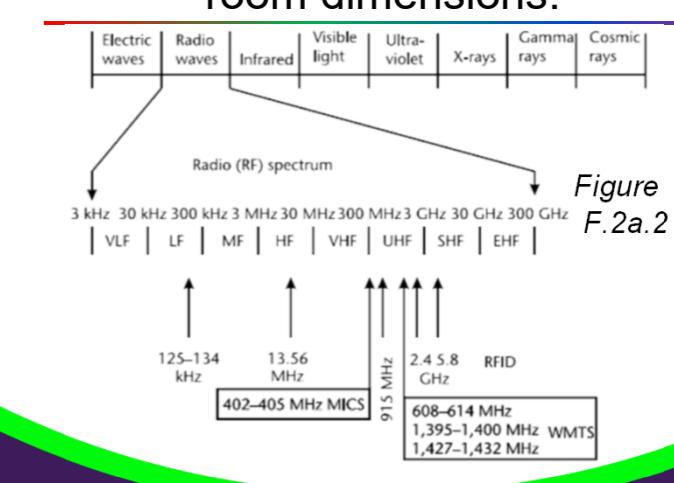

Wireless technologies


Wireless data transmission techniques allow, to some extent, to be used for location tracking. GPS tracking is not suitable for indoor tracking, given that the client must have a clear line of sight to satellites.

WLAN 802.11

The wireless network that an organisation has put in place for data communication, can be used for location tracking. Memory producer Hynix did so in 2005⁰⁸, with the real-time location systems (RTLS), using the 802.11 wireless network for tracking of material and staff. Figure F.2b1.1 shows that RTLS uses the measured distances (d1, d2, d3) to the transmitter, by means like signal strength, to triangulate the location of the target relatively to the three transmitters. RTLS was prepared with the location data of all the transmitters, and the combine outcome is the location of the target. 802.11 operates at 2,4 or 5GHz, providing ranges of up to 70 meters and 1,3GBit/s.

The ZigBee Protocol operates on 2.4 GHz and 868 MHz (Europe) the latter provides good penetration through walls and alike, has lower power consumption and hardware cost is low⁰⁵. Two changes to 802.11: There must be a main transmitter with a connection to a middleware software, called Coordinator. Secondly, other transmitters (called routers) can natively relay data packages, called peer-to-peer, they do not need a wired connection, see figure F.2b1.1. These networks are called Wireless Sensor Networks (WSN)⁰⁹. Again, Signal Strength and RTLS is used for location tracking. Another method is *fingerprinting*, which can also be used in 802.11 WLAN¹⁰. During an offline phase, see figure F.2b1.2, a target-simulator scans and walks through the area of interest and maps reference locations on a grid. On each location, the specific signal strength will be and stored as a *fingerprint* in a large database. In the online phase, targets submit their signal strength and the central system looks the closest value up in its database, and assign it the pre-defined location for this *fingerprint*. Maximal speed is 250kbit/s at an indoor range of 20m.

Near-field communication (NFC) clients are referred to as tags which are very cheap and can store data. The transmitter needs to supply power to the passive tag to exchange information. This data is passed to a middleware, deciding on the next step of the business process. For location tracking, the middleware will have a location per transmitter and know where the item is, based on the received data the middleware can then decide and initiate the next step. NFC is usually on frequency (13,56MHz), has a low price, no power consumption, and very low distance (10 cm) and billions of tags are applied each year¹⁵.

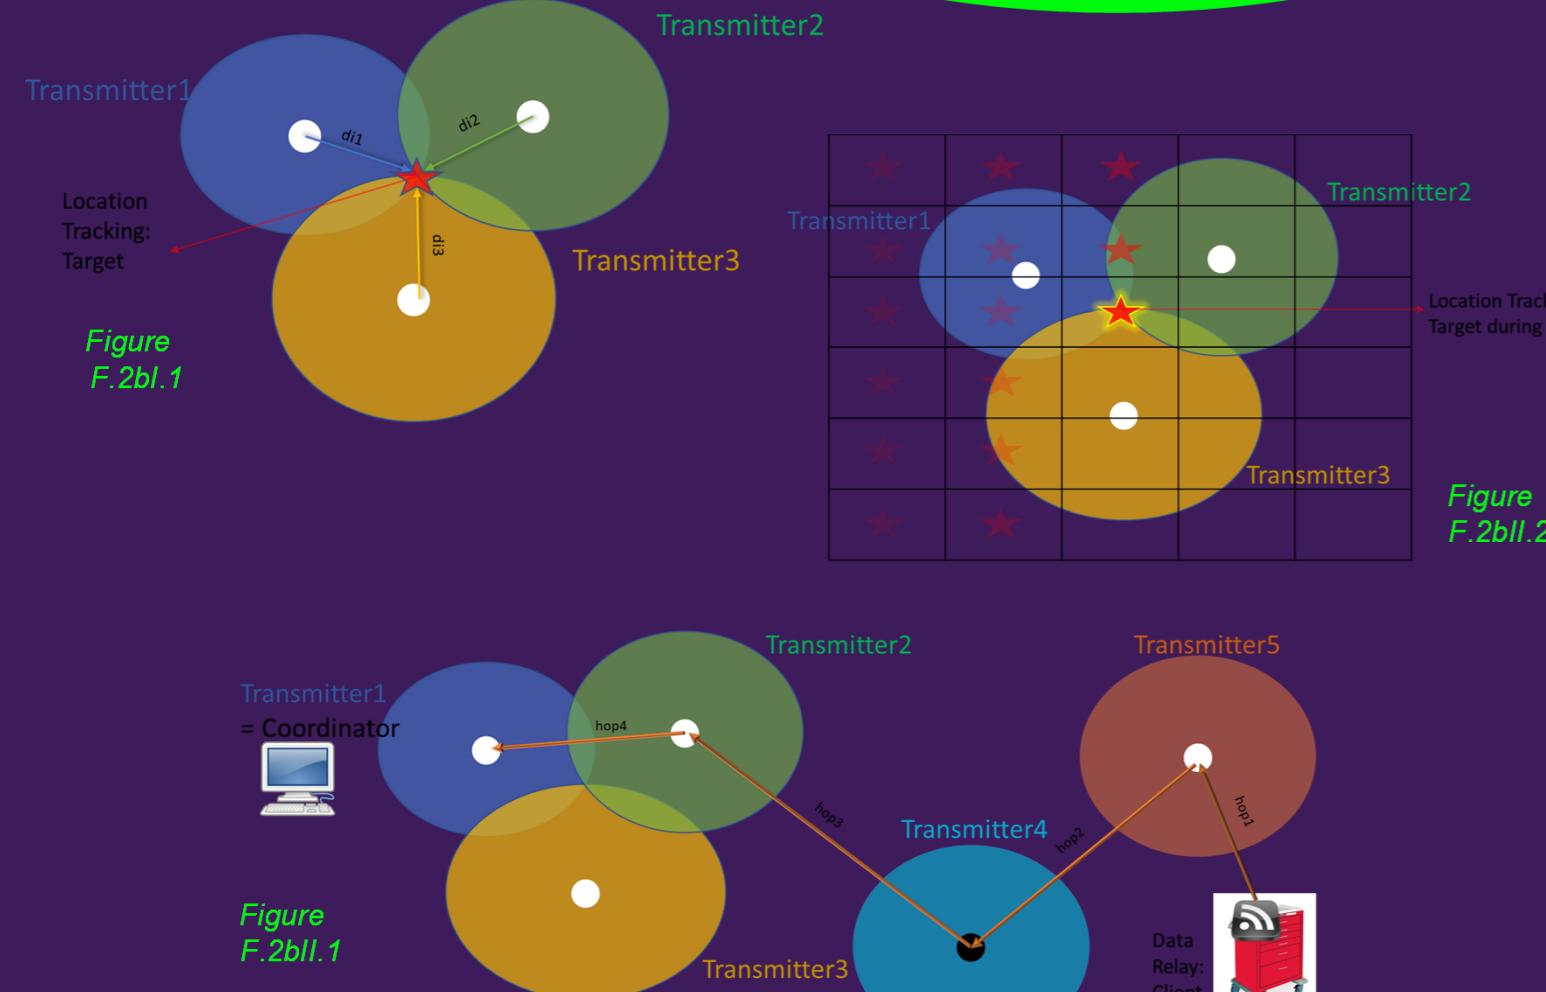

Challenges

Main **technical challenges** are interference and obstacles causing radio waves not to be read correctly by the transmitter, induce variances in the signal and calculated location. Good planning of the area that will be used for wireless, for example via a building information model (BIM) can reduce such impairments¹¹.

Business case and value chain modification: Often organisation's premises have no full coverage of any wireless network due to costs calculations. Established businesses may not have found the need of using any wireless tracking technology, seeing no reason why to invest¹². When the business has decided to setup wireless tracking for a process in the value chain, planning (like BIM) will be important, to estimate the transmitter density and the resulting accuracy required for the use case. It could be found that the project would be excessively expensive with no return of invest.

Security: For NFC tags, their serial number is their MAC address, which can only be written with factory equipment, setting a high hurdle for scammers⁰⁶. Wireless communication can be impacted by intentional denial-of-service (DoS) attacks like jamming, undeliberate misuse or overloading by use of others stopping communication. Where an organisation is relying on wireless location tracking, safety measures like physical shielding and contingency plans for a downtime should be put in place and tested regularly¹³. Security of any data must be guaranteed during the three states: while in transit and when stored in the middleware, with access only to authorized personal⁰⁶.

Privacy & Law: Loss of trust in data security, like the current Facebook debate¹⁴, is building up resistance to adapt new technology like NFC¹⁵. Building trust is one of the key points when working with customers, but also with staff. Key words for ethical standards are honesty, predictability, fairness and openness¹⁶. So when people are tracked, they should be informed about it and allowed to "opt-out" of such tracking to establish a sustainability relationship with either high workforce moral or satisfied customers. As technology has no moral, organisations need to ensure the encoded processes are reflecting the ethical standards of the society the technology will be used in⁰⁶. Organisations must be abided the applicable law:


EU does dictate General Data Protection Regulation (GDPR) with a Privacy by Design and Privacy by Default clause, allowing anonymous use of any service, but with the large amount of data that can be tracked back to one person by using a IoT or mobile devices, it is mandatory to rethink how to programme¹⁷.

Conclusion

Existing wireless **data network** covering the organisation's premises, allow for quick enablement of location tracking. **ZigBee** hardware cost is low⁰⁵ if there is no existing network and only low data bandwidth is required. Only routers require power, only coordinators middleware connections, costs for network cable, installation, network hardware can be saved, this allows the network to be installed or moved quickly and with low effort.

Loyalty cards can move their tracking to **NFC**, allowing for further big data processes like data mining as well as saving money on the plastic card, when using the banks NFC chip¹⁵.

Any organisation should consider building **big data use cases**, but needs to ensure **data security and privacy** to maintain trust of customers and staff.

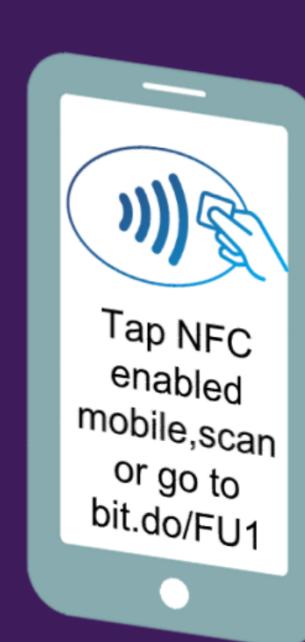

References

01. HARARI, D. (2018). Lectra: Trending in Industry 4.0 with SaaS. New Delhi: Stitch World / Apparel. 02. Hecklau, Galeitze, Flachs, & Kohl. (2016). Holistic Approach for Human Resource Management in Industry 4.0. 6th CIRP Conference on Learning Factories (pp. 1-6). Berlin: Procedia CIRP. 03. Hedley, M., & Gipps, I. (2013). Accurate wireless tracking for underground mining. IEEE International Conference on Communications 2013: IEEE ICC'13 - Workshop on Advances in Network Localization and, (pp. 42-46). 04. Kalantar-zadeh, K. (2013). Sensors - An Introductory Course. New York: Springer Science+Business Media. 05. Yang, S.-H. (2014). Wireless Sensor Networks, Signals and Communication Technology. London: Springer-Verlag. 06. Lehpamer, H. (2012). RFID Design Principles (second ed.). Norwood: Artech House. 08. PR NEWSWIRE EUROPE. (2005, December 02). Ekahau wireless location tracking improves the semiconductor production process for Hynix. 09. De Sales Bezerra, T. A., De Souza, J. A., Da Silva Eleuterio, S. S., & Rocha, J. (2015). Accuracy of propagation models to power prediction in WSN ZigBee applied in outdoor environment. 6th Argentine Conference on Embedded Systems (pp. 19-24). CASE. 10. Swangmuang, N., & Krishnamurthy, P. (2008, December). An effective location fingerprinting model for wireless indoor localization. Pervasive and Mobile Computing, 4(6), p. 836-850. 11. Park a, J., Chen b, J., & Cho, Y. K. (2017). Self-corrective knowledge-based hybrid tracking system using BIM and. ScienceDirect, Advanced Engineering Informatics 32, 126-138. 12. Lee, J., Bagheri, B., & Jin, C. (2016). Introduction to cyber manufacturing. ScienceDirect, 11-15. 13. Larsen, E., Haubitz, C., Wernz, C., & Ratwani, R. (2016). Improving Electronic Health Record Downtime Contingency Plans with Discrete-Event Simulation. Hawaii International Conference on System Sciences, 49, 3179-3188. 14. Yadav, S. (2018). Facebook data breach: Digital experts analyse the after-effects. Adgully 15. Voges, D. (2017). NFC – Great Innovation Is On The Rise, But The Market Remains Very Fragmented - The Diffusion Of Innovation Using The Example Of Near Field Communication (NFC) Multiapplication Platform. Sweden: Kth Royal Institute Of Technology - School Of Industrial Engineering And Management. 16. Ebert, T. (2009). Trust as the Key to Loyalty in Business-to-Consumer Exchanges: Trust Building Measures in the Banking Industry. Wiesbaden: Gabler. 17. Voigt, P., & von dem Bussche, A. (2017). The EU General Data Protection Regulation (GDPR). Springer. 18. Pierdicca, R., Frontoni, E., Polini, R., Trani, M., & Verdini, L. (2017). Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics). 4th International Conference, AVR (pp. 389-401). Ugento: Springer. Figure F.2a.2 Source: Adapted from Lehpamer, H., RFID design principles (Second ed.), Norwood: Artech House, 2012, figure 2.2, p. 7 ; Figure F.2b1.1, F.2b1.1, F.2b1.2 Source: Author (Frederik Unser)



5. Bibliography

- ACCENTURE. (2018). What Does Hyper-Customization In Consumer Packaged Goods Look Like? Kronberg im Taunus, Hessen, Germany. Retrieved March 25, 2018, from <https://www.accenture.com/us-en/insight-what-hyper-customization-consumer-packaged-goods-look-like>
- Bendel, P. D. (2018, January 18). Definition von Industrie 4.0. Basel, Switzerland. Retrieved March 25, 2018, from <https://wirtschaftslexikon.gabler.de/definition/industrie-40-54032/version-277087>
- De Sales Bezerra, T. A., De Sousa, J. A., Da Silva Eleuterio, S. S., & Rocha, J. (2015). Accuracy of propagation models to power prediction in WSN ZigBee applied in outdoor environment. *6th Argentine Conference on Embedded Systems* (pp. 19-24). CASE.
- Ebert, T. (2009). *Trust as the Key to Loyalty in Business-to-Consumer Exchanges: Trust Building Measures in the Banking Industry*. Wiesbaden: Gabler.
- Gill, S. (2013). Industry prepares for the next industrial revolution: automation companies share views on the fourth industrial revolution, Industry 4.0, according to Control Engineering Europe. *Control Engineering*, p18. Retrieved March 25, 2018, from <http://link.galegroup.com.salford.idm.oclc.org/apps/doc/A345693205/AONE?u=salcal2&sid=AONE&xid=1071c27c>
- HARARI, D. (2018). *Lectra: Trending in Industry 4.0 with SaaS*. New Delhi: Stitich World / Apparel Resources Private Limited. Retrieved March 23, 2018, from <http://link.galegroup.com.salford.idm.oclc.org/apps/doc/A524638192/ITOF?u=salcal2&sid=ITOF&xid=6c4bc8a3>
- Hecklau, Galeitzke, Flachs, & Kohl. (2016). Holistic Approach for Human Resource Management in Industry 4.0. *6th CIRP Conference on Learning Factories* (pp. 1-6). Berlin: Procedia CIRP.
- Hedley, M., & Gipps, I. (2013). Accurate wireless tracking for underground mining. *IEEE International Conference on Communications 2013: IEEE ICC'13 - Workshop on Advances in Network Localization and*, (pp. 42-46).
- HSRC. (2018, January 16). Industry 4.0 Market Will Reach \$214B by 2023. Washington D.C. 20004, D.C., USA. Retrieved March 24, 2018, from <https://www.prnewswire.com/news-releases/industry-40-market-will-reach-214b-by-2023-300583073.html>
- Kalantar-zadeh, K. (2013). *Sensors - An Introductory Course*. New York: Springer Science+Business Media .
- Larsen, E., Haubitz, C., Wernz, C., & Ratwani, R. (2016). Improving Electronic Health Record Downtime Contingency Plans with Discrete-Event Simulation. *Hawaii International Conference on System Sciences*, 49, 3179-3188.
- Laudante, E. (2017). Industry 4.0, Innovation and Design. A new approach for ergonomic analysis in manufacturing system. *The Design Journal*, 2724-2734.
- Lee, J., Bagheri, B., & Jin, C. (2016). Introduction to cyber manufacturing. *ScienceDirect*, 11-15.
- Lehpamer, H. (2012). *RFID Design Principles* (second ed.). Norwood: Artech House.



Obitko, M., & Jirkovský, V. (2015). Big data semantics in industry 4.0. *Computer Science (including Subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, pp217-229.

Opel/Vauxhall. (2018, March 25). Opel Exclusive. Ruesselsheim, Hessen, Germany.
Retrieved from <http://www.opel-exclusive.com/en-com/>

Park a, J., Chen b, J., & Cho, Y. K. (2017). Self-corrective knowledge-based hybrid tracking system using BIM and. *ScienceDirect, Advanced Engineering Informatics* 32, 126–138.

Pierdicca, R., Frontoni, E., Pollini, R., Trani, M., & Verdini, L. (2017). Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics). *4th International Conference, AVR* (pp. 389-401). Ugento: Springer.

PR NEWSWIRE EUROPE. (2005, December 02). *Ekahau wireless location tracking improves the semiconductor production process for Hynix*. Retrieved from PR Newswire Europe Including UK Disclose: <https://search-proquest-com.salford.idm.oclc.org/docview/467101844?accountid=8058>

Ross, T. S. (2013). *Laser beam quality metrics*. Society of Photo-Optical Instrumentation Engineers (SPIE).

Smith, R. &. (2014). Revolution, Evolution, or Back to the Future? Lessons from the Electricity Supply Industry's Formative Days. *Distributed Generation and its Implications for the Utility Industry*, pp. 475-499.

Swangmuang, N., & Krishnamurthy, P. (2008, December). An effective location fingerprint model for wireless indoor localization. *Pervasive and Mobile Computing*, 4(6), p. 836-850.

THOMAS REUTER ONE. (2017, April 11). Lectra delivers Industry 4.0 to athletic footwear market with Vector Footwear launch. Île-de-France, Parisian Region, France.
Retrieved from
<http://link.galegroup.com.salford.idm.oclc.org/apps/doc/A489081410/ITOF?u=salcal2&sid=ITOF&xid=f572a4c3>

Ustundag, A., & Cevikcan, E. (2018). *Industry 4.0: Managing The Digital Transformation*. Birmingham: SpringerLink.

Voges, D. (2017). *Nfc – Great Innovation Is On The Rise, But The Market Remains Very Fragmented - The Diffusion Of Innovation Using The Example Of Near Field Communication (Nfc) Multiapplication Platform*. Sweden: Kth Royal Institute Of Technology - School Of Industrial Engineering And Management.

Voigt, P., & von dem Bussche, A. (2017). *The EU General Data Protection Regulation (GDPR)*. Springer.

Yadav, S. (2018). Facebook data breach: Digital experts analyse the after-effects. *Adgully*, 1. Retrieved from
<http://link.galegroup.com.salford.idm.oclc.org/apps/doc/A532293235/ITOF?u=salcal2&sid=ITOF&xid=fb986db6>

Yang, S.-H. (2014). *Wireless Sensor Networks, Signals and Communication Technology*. London: Springer-Verlag. doi:10.1007/978-1-4471-5505-8_1



6. Appendix A1: Reflecting on the creation process

Using the Gibb's reflection cycle for debriefing as shown on www.salford.ac.uk/skills-for-learning/home/reading-and-writing#reflective and reviewed by Husebø, S.E., O'Regan S. & Nestel, D (2015) for use in the health sector.

Word Count: 325 (not counting Introduction and Reference)

a) Description

I am currently studying Information Technology Management at the Salford University, provided via Robert Kennedy College as a distance learning programme. As part of the study, the Digital Innovation course's mid-term assignment, I was asked to write a literature review about opportunities and challenges from the use of sensors (or a subset) for businesses. The literature review and the required poster are now completed as I write these words for the reflecting cycle.

b) Feelings

I was excited to get started on the technical areas of my study, combined with more time. This was damped when I received the marks from the earlier, very literature based, final assignment which came in much lower than the mid-term review.

c) Evaluation

At this time, I was on a vacation but had my learning materials with me, however I did not start to write (or read), despite having my target area for the literature review identified and a framework drafted. When starting the reading on sensors and their computerized usage, they reminded me of my A-Levels in physics which I liked. When writing about wireless I could find topics from my earlier and everyday connections like NFC in my own credit cards. After I was done with the literature review, I had too many words.

d) Analysis

Topics like detailed physical formulas, RADAR, child tracking and recap were removed to fit in the word count. This did result in extra work while removing topics that had already worked effort in them, consuming time.

e) Conclusion

My conclusion: First there must be focus to use nearly all words for the assignment, even if subjectively more interesting topics are related to the given task are found. Secondly, my draft-structures of the assignment should be assigned a broken-down word count which should be checked regularly.

f) Action Plan

The next assignment, more regular checks must be done to ensure word count and topics are in line with the assignment.

References:

Husebø, S.E., O'Regan, S. & Nestel, D (2015). Reflective Practice and Its Role in Simulation. *Clinical Simulation in Nursing, Volume 11, Issue 8*, p. 368-375

7. A2: Industry 4.0

The Industrial development can be categorized in the four steps shown in figure F.A2.1

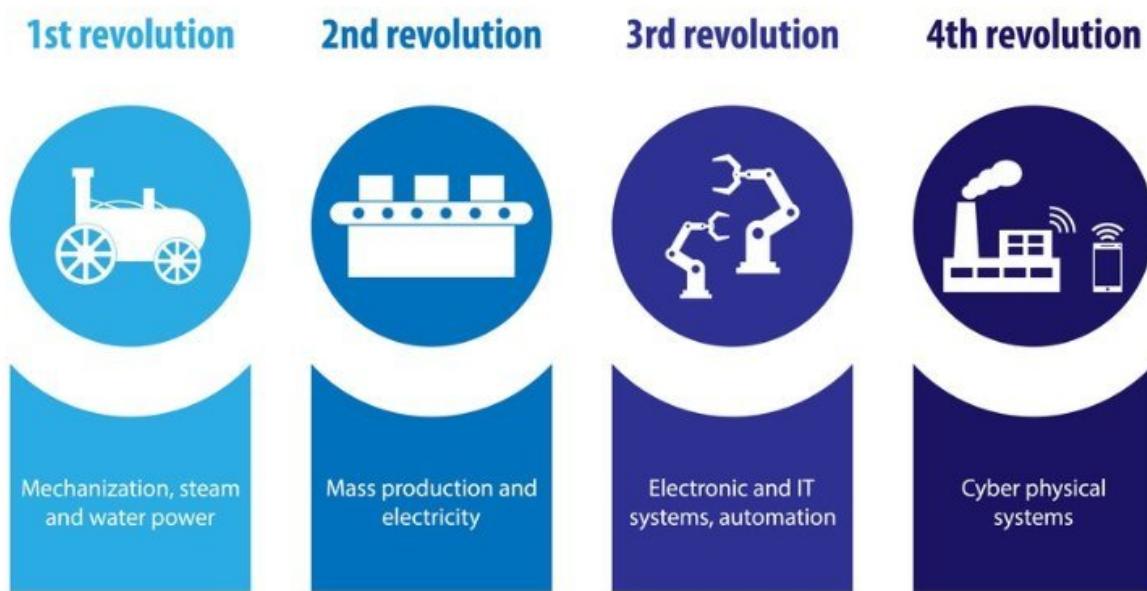


Figure F.A2.1: Characterization of the four industrial development steps up to 4th revolution.

Source: Bill McCabe, IOT Central, Received from: <https://www.iotcentral.io/blog/the-evolution-of-industry-4-0>

In the first step, around 1784, there is the industrialisation that allowed for great production and a more efficient production than doing things “by hand”, the second step is the mass production and the greater use and availability of electricity (Smith, 2014). In a third step, the use of IT systems and automation (the use of robots) moved into the manufacturing and any other industrial sector (Gill, 2013).

The fourth revolution “Industry 4.0” is a forecasted outlook from a German study started by the government and completed by several universities in 2013 (Bendel, 2018). In this, the new outlook of a customized product, based on the Big Data trends (Obitko & Jirkovský, 2015) and the IT-enabled hyper customisation (ACCENTURE, 2018), allowing (and setting the expectation of customers) to get a highly customized product. Opel/Vauxhalls offers to produce a car with your very own colour (Opel/Vauxhall, 2018) – not only, like Henry Ford said 1909 at the start of the second Revolution, “any colour so long as it is black”.

This and chapter 1 shows that in the current and future industrial environment, IT-connected environments and customised products become more and more important and ultimately financially vital for many organisations (HSRC, 2018).

Out of the nine pillars of industry 4.0 (Laudante, 2017), the following would be mostly exposed to tracking: Autonomous robots (as receivers), the Industrial Internet of Things (IOT) (as infrastructure support), Additive manufacturing and Augmented Reality (as receivers) and to a remote extend the Cloud and big data, collecting and computing the data and being protected by (Cyber-) Security. Already, there may be partial appliance of these theories in some businesses today, like tracking your parcel online, but connecting all the business processes (including customer input) and value creation combined, is what is defining the new age of Industry 4.0.

The bridge between IT-based business processes and resources or people are defined as Cyber-Physical system (CPS), which allows to interact with each other, for example via



sensors or tablets, which are mostly part of an IOT device (Obitko & Jirkovský, 2015). There are several technical feasible options for measuring, their choice is depending on the business case and purposed environment setup. The two most common systems found are RFID and WLAN/WSN based systems which the upcoming chapters will review and highlight strength and weaknesses.

One aspect of this will be the logistic and location tracking of the products, resources and visualisation of the environment. While there are macro locations, for example a city or manufacturing site, it may also be vital to the business to know where any individual and customized product is in such a site (micro location).

To do all this, without any additional waiting time or increase in price, organisations need to reorganise and integrate their value chain into systems that allow them to deliver seamlessly (Ustundag & Cevikcan, 2018).